
CIRCULAR BREAKING SAW Model SPC 140, Model SPC 165



The Jarvis Model SPC 140 and Model SPC 165 - pneumatic powered general purpose breaking saws.

- The SPC 140, with a 1.5 in (38 mm) cutting depth, or SPC 165 with a 2 in (51 mm) cutting depth, are ideally suited for:
 - Beef: Breaking forequarters and beef plates, also hot and cold ribbing
 - Pork: Ham and shoulder marking, ribbing and chine bone removal.
- Lightweight and flexible allows operators to use the tool both hanging and on the table.
- More power high efficiency air motor for more horsepower and lower operating costs.
- Heavy duty gears made to withstand all uses in the packing plant industry.
- New style USDA approved blade guard for easy internal sanitation.
- All stainless construction.
- Lever style adjustable depth gauge for precise depth control.
- Instant stop blade.
- Meets national and international requirements for hygiene and safety. USDA and CE approved.



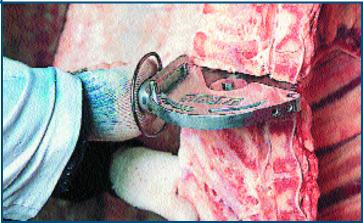



CIRCULAR BREAKING SAW Model SPC 140, Model SPC 165

Specifications		
Drive		Pneumatic
Model SPC 140 / SPC 165		
Motor Power	.85 hp	630 W
Operating Pressure	90 psi	6.1 bar
Air Consumption	27.3 ft ³ / min	0.77 m ³ / min
Blade Speed		1775 rpm
Control Handle		
Single Trigger		Pneumatic
Blade Diameter		
SPC 140	5.5 in	140 mm
SPC 165	6.5 in	165 mm
Cutting Depth (maximum)		
SPC 140	1.5 in	38 mm
SPC 165	2.0 in	51 mm
Overall Length	16.5 in	419 mm
Weight	5.85 lbs	2.65 kg
Equipment Selection and Accessories		Order Number
Model SPC 140 / SPC 165	·	
SPC 140		4001027
SPC 165		4001028
Air Hose	length 16 ft / 5 m	3059018
Air Filter / Regulator / Lubrica	tor	3022003
Blades		
SPC 140	\varnothing 5.5 in / 140 mm blade - 120 teeth	1023362
Ø 5.5 in / 140	mm blade, skip tooth blade - 60 teeth	1023363
SPC 165	\varnothing 6.5 in / 165 mm blade - 140 teeth	1023324
	mm blade, skip tooth blade - 60 teeth	1023308
Optional:	"T" Handle - Right Hand	1019197
	"T" Handle - Left Hand	1019198
Balancer		4042022

