
AIRSNIP[®] Model 15, Model 35, Model 70

U.S. Trademark Registration No. 1,701,428

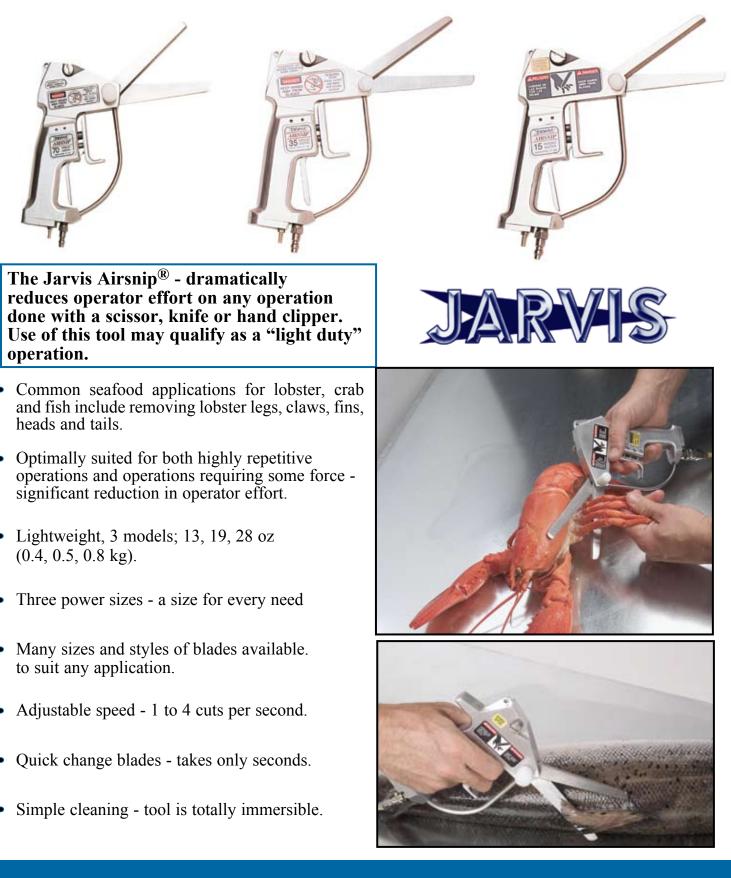

LIGHTWEIGHT - FAST - EFFICIENT

AIRSNIP[®] Model 15, Model 35, Model 70

Specifications		
Drive		Pneumatic
Airsnip [®] Model 15, Model 35, Model 70		
Operating Pressure (All Models)	60 - 250 psi	4 - 17 bar
Air Consumption (per 1000 cuts)		
Model 15	0.01 - 0.04 ft ³	1 - 2 L
Model 35	0.04 - 0.16 ft ³	1 - 4 L
Model 70	0.07 - 0.30 ft ³	2 - 8 L
Capacity (All Models) (strokes per second)		1 - 4
Cutting Force (3.5 in / 90 mm from blade pivol	t at 100 psi / 6.9 bar)	
Model 15	15 lbf	0.07 kN
Model 35	35 lbf	0.16 kN
Model 70	70 lbf	0.31 kN
Control Handle (All Models)	Operating Trigger	and Safety Trigger
Blade Opening (at tips)		
Model 15	1.7 in	43 mm
Model 35	2.2 in	56 mm
Model 70	2.7 in	68 mm
Blade Length (Standard)		
Model 15	4.0 in	102 mm
Model 35	10.0 in	254 mm
Model 70	10.5 in	267 mm
Weight		
Model 15	13 oz	0.4 kg
Model 35	19 oz	0.5 kg
Model 70	28 oz	0.8 kg
Equipment Selection and Accessories		Order Number
Airsnip [®]		
Blade Length		
Model 15 tool complete: includes ho		4019007
Model 35 tool complete: includes ho		4019008
Model 70 tool complete: includes ho	se assembly, blade set	4019009
Air / Regulator / Lubricator (All Models)		3346002
Balancer		1350084
Power-Pak (250 psi / 17 bar)		4026016

JARVIS

Products for the meat and poultry industry

Jarvis Products Corporation · 33 Anderson Road · Middletown, CT 06457-4926 · United States of America Telephone (860) 347-7271 · Fax (860) 347-9905 · sales@jarvisproducts.com · www.jarvisproducts.com